

## Peak Emission Wavelength: 255nm


The MTSM2550HSF-UV is a powerful deep UV-C emitting device. A peak wavelength of 255nm LED creates new feasibility for a variety of applications. This UV Emitter is in a Seam Welded Surface Mount package for applications requiring high output power and efficiency.

### FEATURES

- > 5mm x 5mm Seam Welded Surface Mount Package
- > Hermetically Sealed Package
- > High Output Power
- > Silanna Safe

### APPLICATIONS

- > UV Curing
- > Air and Water Disinfection
- > DNA Protein Analysis
- > Gas Sensing

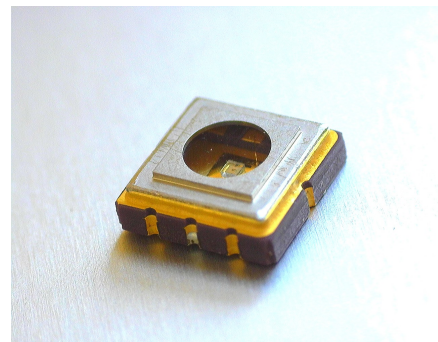

## Absolute Maximum Ratings (Ta=25°C)




ITEMS	SYMBOL	RATINGS	UNIT
Forward Current	IF	100	mA
Reverse Voltage	VR	TBD	V
Power Dissipation	PD	700	mW
Operating Temperature	Topr	TBD	°C
Storage Temperature	Tstg	-40 ~ +100	°C

**Note: Also available on PCB - Starboard MTSM2550HSF-UV2 (See Page 3)**


## Electrical & Optical Characteristics (Ta = 25°C)

ITEMS	SYMBOL	CONDITIONS	MIN.	TYP	MAX.	UNIT
Forward Voltage	VF	IF=20mA	--	5.6	--	V
Peak Wavelength	$\lambda_p$	IF=20mA	--	258	--	nm
Radiant Flux	PO	IF=20mA	--	840	--	uW
FWHM	$\Delta\lambda$	IF=20mA	--	11	--	nm
View Angle	$\Theta$	IF=20mA	--	120	--	deg


Package Dimensions

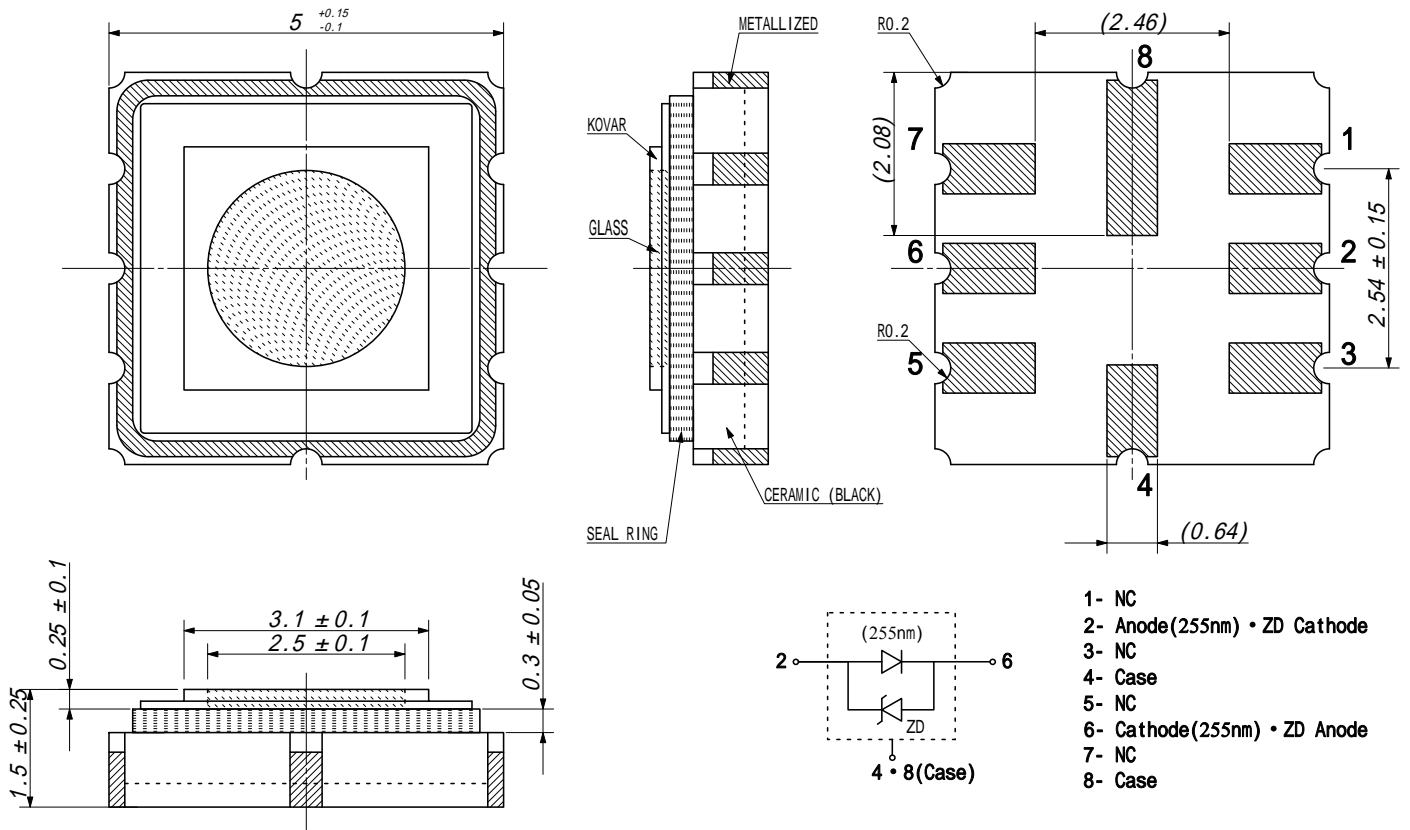


Recommended Soldering Pattern [mm]

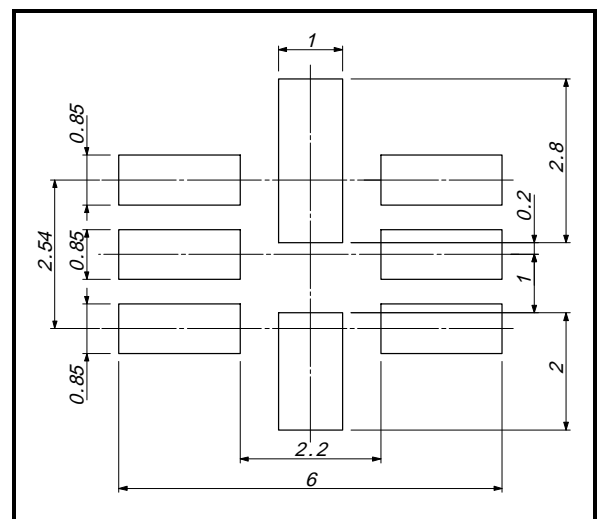


Reflow Soldering Temperature-Profile [Pb free Soldering] (Recommend condition)

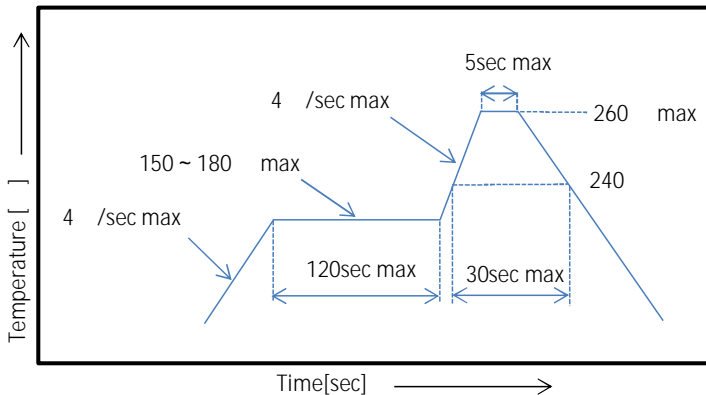

Starboard Dimensions

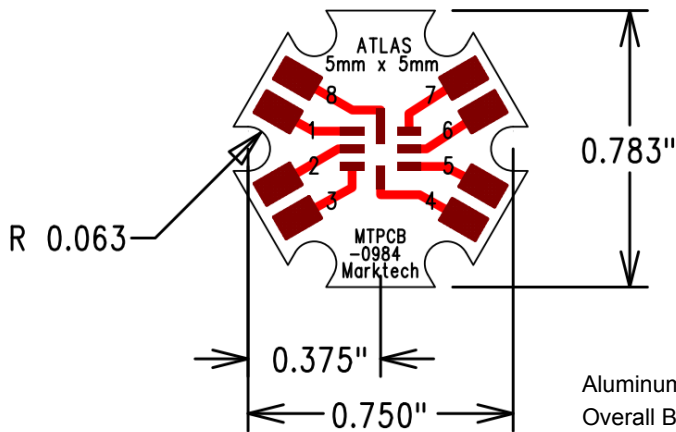

Pin 1	NC
Pin 2	Anode
Pin 3	NC
Pin 4	Case
Pin 5	NC
Pin 6	Cathode
Pin 7	NC
Pin 8	Case

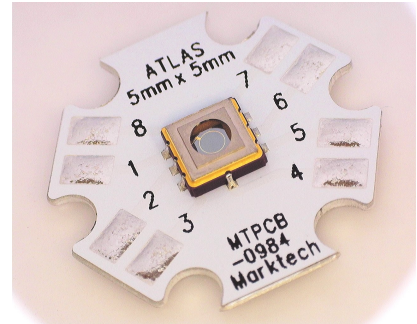

Aluminum Core Board 0.040" (1.02mm) Thickness  
Overall Board Dimensions: +/- 0.010" (0.254mm)




We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.


The information contained herein is subject to change without notice.

2024-01-18


Spectral Response

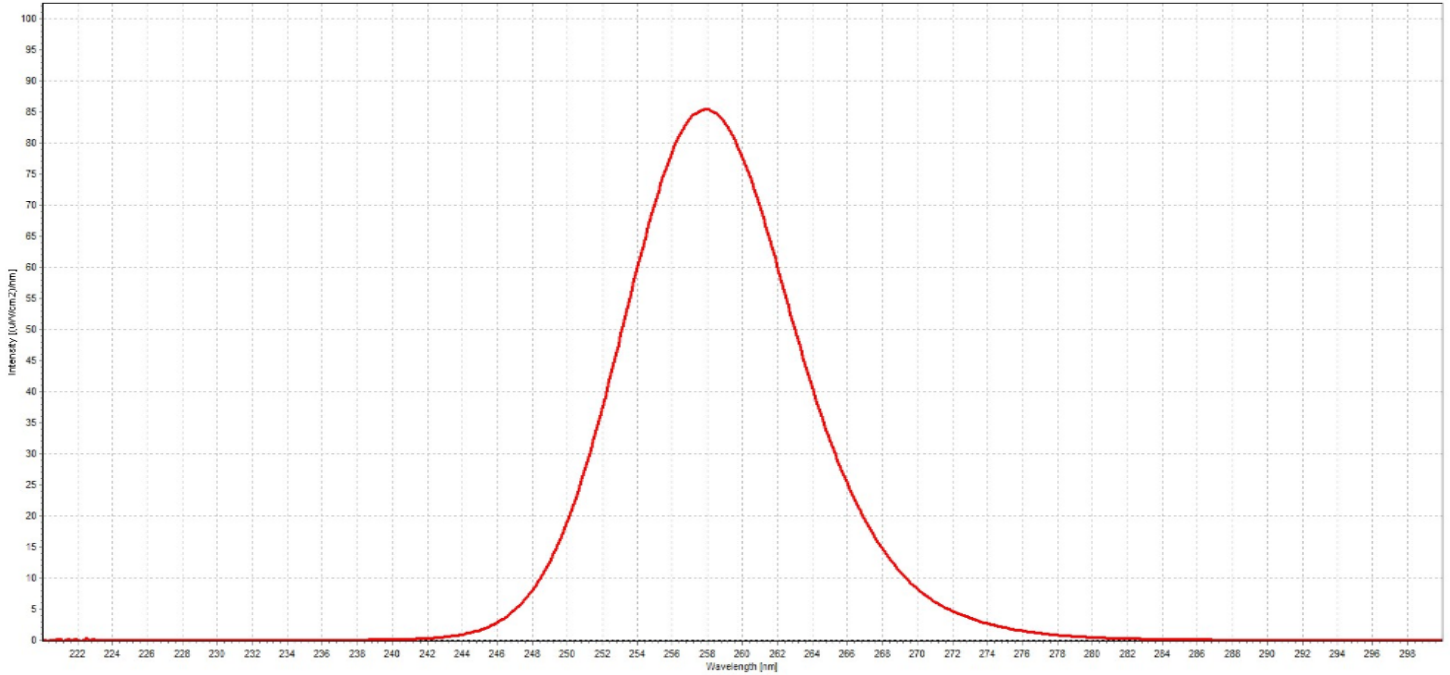



Radiation Distribution

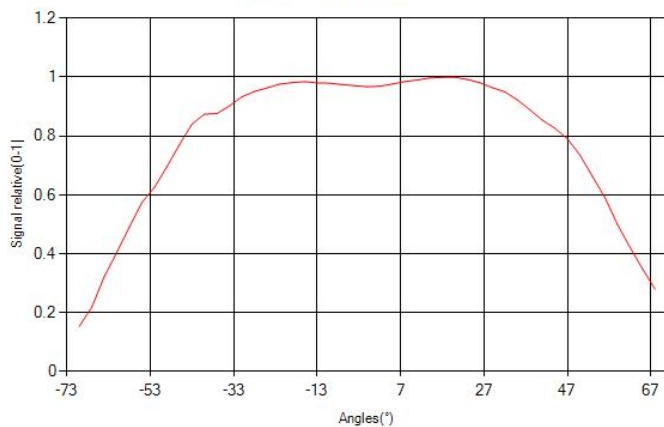

View Angle

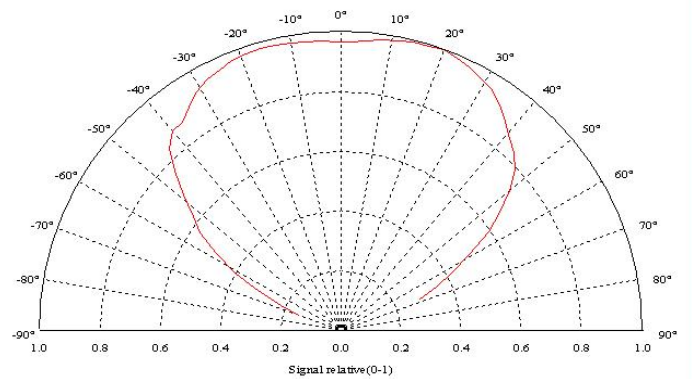

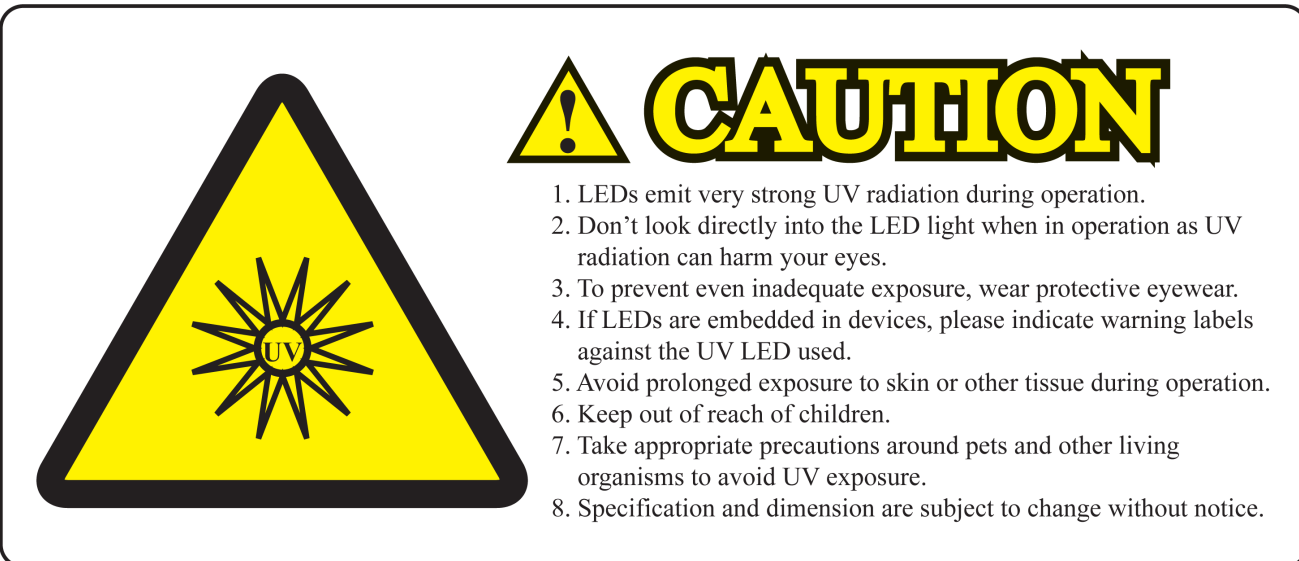

 **CAUTION**

1. LEDs emit very strong UV radiation during operation.
2. Don't look directly into the LED light when in operation as UV radiation can harm your eyes.
3. To prevent even inadequate exposure, wear protective eyewear.
4. If LEDs are embedded in devices, please indicate warning labels against the UV LED used.
5. Avoid prolonged exposure to skin or other tissue during operation.
6. Keep out of reach of children.
7. Take appropriate precautions around pets and other living organisms to avoid UV exposure.
8. Specification and dimension are subject to change without notice.